

# JSB-G12-160 (12V160Ah)



JSB-G12-160 is GEL Standby battery with 10 + years floating design life time .The solid Gel protects no way to suffer electrolyte stratification and ensure mild corrosion, its special separator eradicates infection between plates to prevent short circuit. it offers extra-durable performance under extreme temperature.

## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	160Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 53 Kg
Max. Discharge Current	1600 A (5 sec)
Internal Resistance	Approx. 6 mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	32A
Equalization and Cycle Service	14.2 to 14.4 VDC/unit Average at 25°C
Self Discharge	JALPOWER batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F12
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539






G4M20206-0910-E-16




ISO9001:2000 Certificate

## Dimensions

Unit: mm Dimension: 530(L)×209(W)×214(H)

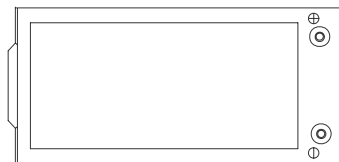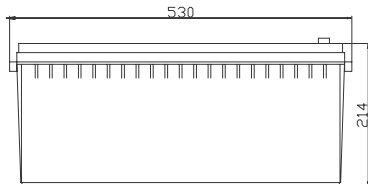

Terminal F12



## Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	525.63	376.66	274.06	172.04	97.240	54.438	39.046	32.314	25.432	18.782	15.880	8.3983
10.0V	511.58	358.39	268.44	169.20	96.791	54.028	38.896	32.164	25.282	18.629	15.728	8.2456
10.2V	482.07	345.74	264.22	167.70	95.894	53.619	38.597	32.014	25.133	18.476	15.575	8.0929
10.5V	432.88	319.03	251.57	163.51	94.996	53.210	38.447	31.715	24.834	18.324	15.422	7.9402
10.8V	390.71	290.93	231.90	156.33	92.752	52.255	37.400	30.967	24.385	18.018	15.270	7.7875
11.1V	340.12	260.01	208.01	146.46	88.114	49.935	35.754	29.471	23.338	17.255	14.812	7.3295

## Constant Power Discharge Characteristics: W (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.6V	5006.2	3660.8	2695.4	1941.5	1112.1	626.24	450.60	373.40	294.41	217.94	178.57	94.320
10.0V	4903.9	3496.5	2639.4	1917.3	1106.7	623.78	449.70	372.50	292.62	217.03	176.74	93.404
10.2V	4629.2	3380.0	2603.5	1894.8	1098.7	618.05	447.00	370.71	291.72	215.20	175.82	92.488
10.5V	4168.5	3123.2	2482.6	1851.7	1087.9	612.32	444.31	368.02	289.03	213.36	173.99	91.573
10.8V	3749.6	2835.7	2281.0	1767.4	1061.0	603.32	433.54	358.14	284.54	208.79	172.16	90.657
11.1V	3236.7	2518.4	2036.8	1656.1	1005.3	575.48	412.00	341.09	270.18	201.46	166.66	86.994

All mentioned values are average values.

### Effect of temperature on long term float life



### Storage characteristic

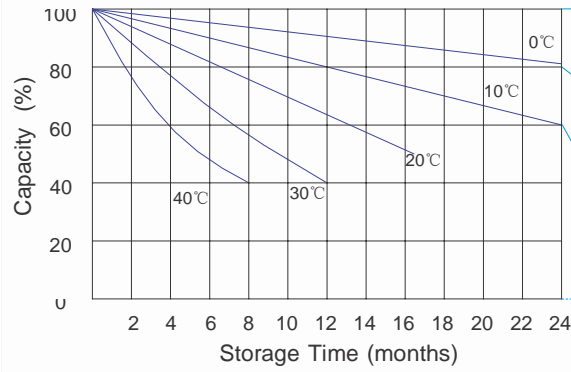


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is required)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guidelines

### Charge characteristic Curve for standby use

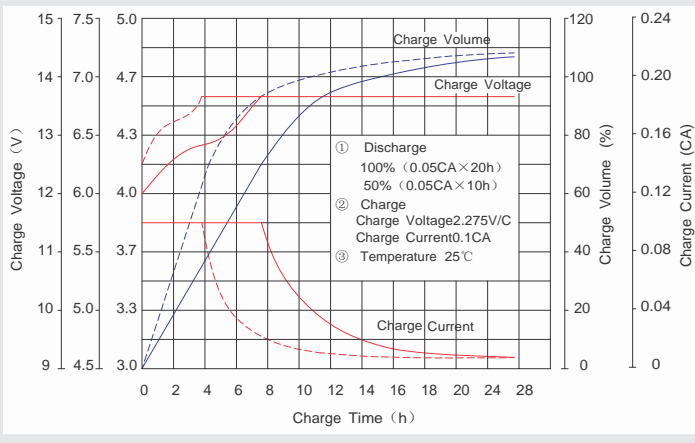

### Discharge characteristic Curve

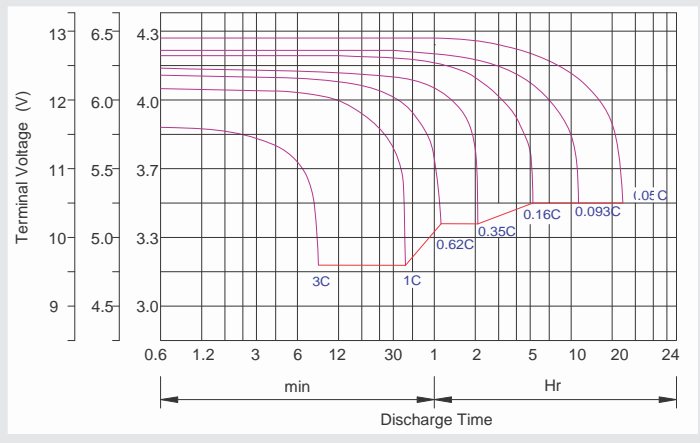

### Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

### Maintenance & Cautions

<b>Float Service:</b>
※ Every month, recommend inspection every battery voltage.
※ Every three months, recommend equalization charge for one time.
Equalization charge method:
Discharge: 100% rate capacity discharge.
Charge: Max. current 0.2CA, constant voltage 2.35-2.4V/Cell charge 24h.
※ Effect of temperature on float charge voltage: -3mV/°C/Cell.
※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+2.35-2.4V/cellx24h, Max. Current 0.2CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h