

# JSB-A12-260 (12V260Ah)



JSB-A12-260 is a general purpose battery with 10 years floating design life, meet with IEC, JIS .BS and Eurobat standard. With heavy duty grid, thickness plates, special additives, JSB-A series battery have long and reliable standby service life. Our JSB-A series batteries keep high consistent for better performance in series usage.

## Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	260Ah@10hr-rate to 1.75V per cell @25°C
Weight	Approx.74.0 Kg
Max. Discharge Current	2600A (5 sec)
Internal Resistance	Approx. 3.5 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	78 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	JSB-A SERIES batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F14
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539



G4M20206-0910-E-16



ISO9001:2000 Certificate

## Dimensions

Unit: mm Dimension: 520(L)×268(W)×225(H)

Terminal F14



### Constant Current Discharge Characteristics: A (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	905.50	668.93	486.72	299.00	169.00	94.40	67.860	56.160	45.968	32.297	27.308	14.442
10.0V	881.29	636.48	476.74	294.06	168.22	93.69	67.600	55.900	45.698	32.034	27.045	14.179
10.2V	830.44	614.02	469.25	291.46	166.66	92.98	67.080	55.640	45.427	31.771	26.783	13.916
10.5V	745.70	566.59	446.78	284.18	165.10	92.27	66.820	55.120	44.886	31.509	26.520	13.654
10.8V	693.89	516.67	411.84	271.70	161.20	90.618	65.000	53.820	44.075	30.984	26.257	13.391
11.1V	604.03	461.76	369.41	254.54	153.14	86.596	62.140	51.220	42.182	29.671	25.470	12.604

### Constant Power Discharge Characteristics: W(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.6V	8624.1	6501.4	4786.9	3374.3	1932.8	1086.0	783.12	648.96	532.15	374.77	307.06	162.19
10.0V	8447.9	6209.7	4687.4	3332.2	1923.5	1081.7	781.56	647.40	528.90	373.20	303.91	160.62
10.2V	7974.6	6002.8	4623.8	3293.2	1909.4	1071.8	776.88	644.28	527.28	370.05	302.34	159.04
10.5V	7181.0	5546.7	4409.0	3218.3	1890.7	1061.9	772.20	639.60	522.41	366.90	299.19	157.47
10.8V	6659.2	5036.1	4050.9	3071.6	1843.9	1046.2	753.48	622.44	514.30	359.02	296.04	155.89
11.1V	5748.2	4472.6	3617.3	2878.2	1747.2	998.0	716.04	592.80	488.34	346.43	286.59	149.59

All mentioned values are average values.

### Effect of temperature on long term float life



### Storage characteristic

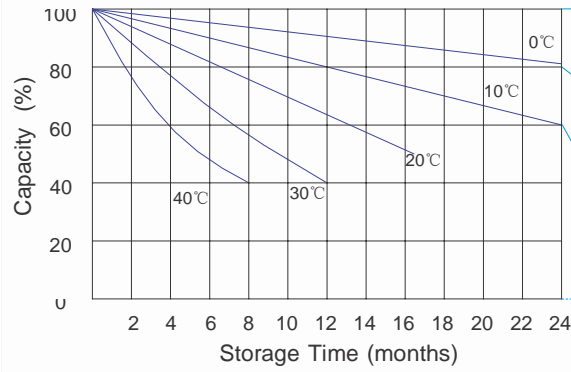


Supplementary charge required before use if 100% capacity is requires)

Supplementary charge required. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left

Supplementary charge and storage guidelines

### Charge characteristic Curve for standby use

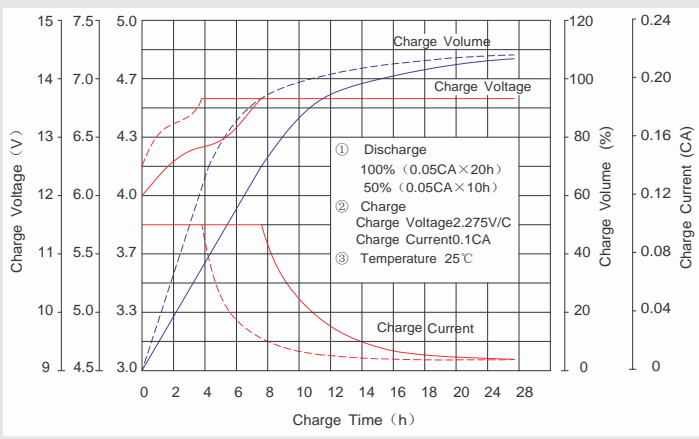

### Discharge characteristic Curve

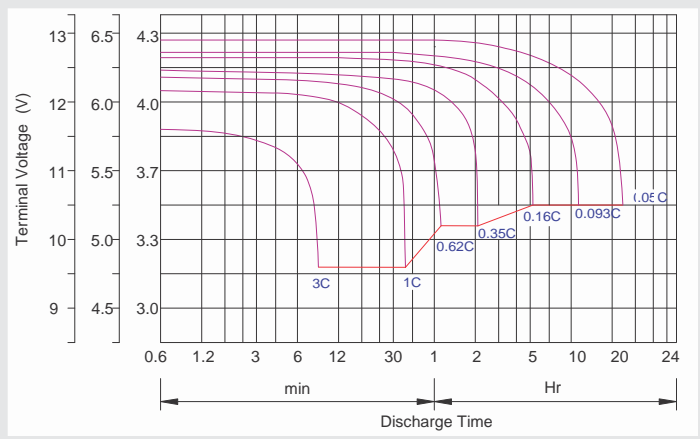

### Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx 12h
Fast	-0.2Cx2h+0.3CAx4.0h

### Maintenance & Cautions

<b>Float Service:</b>
※ Every month, recommend inspection every battery voltage.
※ Every three months, recommend equalization charge for one time.
Equalization charge method:
Discharge: 100% rate capacity discharge.
Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.
※ Effect of temperature on float charge voltage: -3mV/°C/Cell.
※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.